

# Schall-Ex® GS-H20

## DETAILS

Articlenumber	1-439
Function	hinged door
Türenmaterial	glass
Application	interior door
Usage	sound protection, smoke protection, accessibility

## TECHNICAL DATA



Width	25.5 mm
Height	68 mm
Min. delivery length	220 mm
Max. delivery length	2000 mm
Thickness of glass	20 mm
Standard length	708, 833, 958, 1083, 1208 mm
max. travel	12 mm
Actuation	single-sided
Actuator	actuator
Outerprofile	aluminium
Surface	silver anodized (C-0)
Sealingprofile	silicone, self-extinguishing

## FITTING

Fixing	glude glue/ silicon transpaent
--------	-----------------------------------

## EXAMINATIONS AND CERTIFICATES

Permanent function 200k	yes
Permanent function 1M	yes
Mio Certificate	yes
Leakage rate certificate	yes
Barrier free	yes
EPD	yes

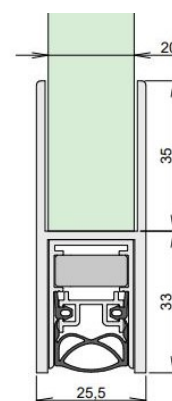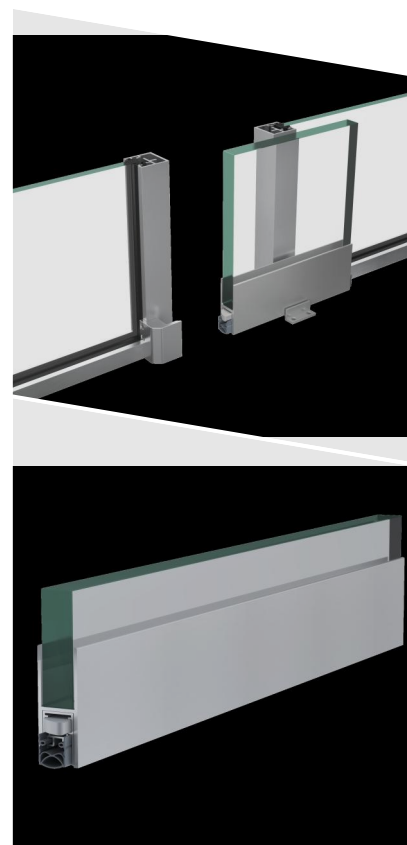



# I-Ex<sup>®</sup> GS-H20

