

# Stadi L-24/20 OS

## DETAILS

Articlenumber	1-959
Function	hinged door
Türenmaterial	timber, metal, PVC
Application	exterior door, interior door
Usage	sound protection, smoke protection, fire protection, accessibility

## TECHNICAL DATA



Width	24 mm
Height	20 mm
Min. delivery length	230 mm
Max. delivery length	3000 mm
Standard length	750, 900, 1050, 1200 mm
max. travel	16 mm
Actuation	single-sided
Actuator	sliding acutator
removable inner profile	yes
Outer profile	aluminium
Surface	plate finish
Sealing profile	silicone, self-extinguishing

## FITTING

Fixing	OS - omega-shaped profile screw under
Espagnolette bolt	yes

## EXAMINATIONS AND CERTIFICATES

Permanent function IM	yes
Mio Certificate	yes
Leakage rate certificate	yes
Corrosion test	yes
Corrosion	yes
Barrier free	yes

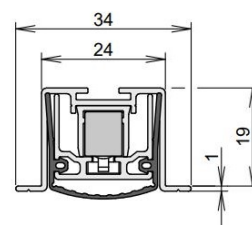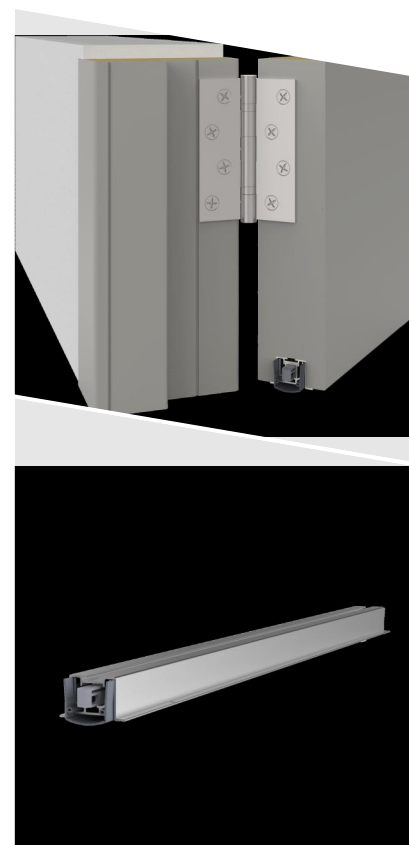

# Stadi L-24/20 OS

UL yes

EPD yes

Certifire yes

